

Catalog 2024

NINGBO SELLWELL LIGHTING APPLIANCE CO.,LTD





SL015



160LM/W



Energy Grade C



60/70/90°*140°



5 Years Warranty



SMD 3030



50,000h

LifeSpan



Waterproof



Impact Protection

Product Features

- LED Brand: Lumiled 3030
- Luminous Option: 150LM/W
- Color Temp: 4000/5000/6500K
- Color Rendering: Ra>70
- Application: Street, Highway, Intersection
- Driver Brand: Self-made, Lifud, Sosen, Philips
- Surge Protection: 4KV/6KV/10KV
- Power Factor: >0.95
- Driver Replaceable: Yes
- Material: Diecasting Aluminum+Tempered Glass

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
30	100-277	4500	● 4000 ○ 5000 ○ 6500	340*155*64mm	20pc/0.080m³
50	100-277	7500	● 4000 ○ 5000 ○ 6500	401*173*68mm	10pc/0.056m³
100	100-277	15000	● 4000 ○ 5000 ○ 6500	505*200*77mm	10pc/0.090m³
150	100-277	22500	● 4000 ○ 5000 ○ 6500	560*223*77mm	5pc/0.058m³
200	100-277	30000	● 4000 ○ 5000 ○ 6500	625*253*78mm	5pc/0.073m³

SL015



160LM/W



Energy Grade C



60/70/90*140°



5 Years Warranty



SMD 3030



50,000h

LifeSpan



Waterproof



Impact Protection

Product Features

- LED Brand: Lumiled 3030
- Luminous Option: 120/140LM/W
- Color Temp: 4000/5000/6500K
- Color Rendering: Ra>70
- Application: Street, Highway, Intersection
- Driver Brand: Self-made, Lifud, Sosen, Philips
- Surge Protection: 4KV/6KV/10KV
- Power Factor: >0.95
- Driver Replaceable: Yes
- Material: Diecasting Aluminum+Tempered Glass

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
50	100-277	7000	● 4000 ○ 5000 ○ 6500	530*158*100mm	1pc/0.011m ³
100	100-277	14000	● 4000 ○ 5000 ○ 6500	583*177*100mm	1pc/0.015m ³
150	100-277	21000	● 4000 ○ 5000 ○ 6500	645*214*100mm	1pc/0.019m ³
200	100-277	28000	● 4000 ○ 5000 ○ 6500	717*244*100mm	1pc/0.025m ³

SL017



140LM/W



Energy Grade D



70°140°



5 Years Warranty



SMD 3030



50,000h

LifeSpan



Waterproof



Impact Protection

Product Features

- LED Brand: LED 3030
- Luminous Option: 100/120LM/W
- Color Temp: 4000/5000/6500K
- Color Rendering: Ra>70
- Application: Street, Highway, Intersection
- Driver Brand: Self-made Isolation
- Surge Protection: 4KV/6KV/10KV
- Power Factor: >0.90
- Driver Replaceable: Yes
- Material: Diecasting Aluminum+PC Lens

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
30	100-277	3600	4000 5000 6500	313*123*60mm	30pc/0.090m ³
50	100-277	6000	4000 5000 6500	375*133*60mm	20pc/0.077m ³
100	100-277	12000	4000 5000 6500	430*146*75mm	10pc/0.053m ³
150	100-277	18000	4000 5000 6500	540*175*80mm	5pc/0.049m ³
200	100-277	24000	4000 5000 6500	590*213*80mm	5pc/0.063m ³

SL006



110LM/W




Energy Grade D



70°140°



3 Years Warranty



SMD 2835



30,000h

LifeSpan



Waterproof



Impact Protection

Product Features

- LED Brand: LED 2835
- Luminous Flux: 110LM/W
- Color Temp: 4000/5000/6500K
- Color Rendering: Ra>70
- Application: Rural-Road, Parking Lot, Sideway
- Driver Brand: Linear, DOB
- Surge Protection: 2KV/4KV
- Power Factor: >0.90
- Driver Replaceable: Yes
- Material: Diecasting Aluminum+PC Lens

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
30	100-277	3000	4000 5000 6500	375*155*65mm	20pc/0.086m³
50	100-277	5000	4000 5000 6500	420*173*65mm	10pc/0.056m³
100	100-277	10000	4000 5000 6500	530*200*75mm	5pc/0.052m³
150	100-277	15000	4000 5000 6500	590*223*75mm	5pc/0.064m³
200	100-277	20000	4000 5000 6500	655*253*75mm	5pc/0.081m³

SL007



110LM/W



Energy Grade E



70°140°



3 Years Warranty



SMD 2835



30,000h

LifeSpan



Waterproof



Impact Protection

Product Features

- LED Brand: LED 2835
- Luminous Flux: 110LM/W
- Color Temp: 4000/5000/6500K
- Color Rendering: Ra>70
- Application: Rural-Road, Parking Lot, Sideway
- Driver Brand: Linear, DOB
- Surge Protection: 2KV/4KV
- Power Factor: >0.90
- Driver Replaceable: Yes
- Material: Diecasting Aluminum+PC Lens

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
30	100-277	3600	4000 5000 6500	340*155*64mm	20pc/0.078m³
50	100-277	6000	4000 5000 6500	401*173*68mm	10pc/0.054m³
100	100-277	12000	4000 5000 6500	505*200*77mm	5pc/0.050m³
150	100-277	18000	4000 5000 6500	560*223*77mm	5pc/0.061m³
200	100-277	24000	4000 5000 6500	625*253*78mm	5pc/0.077m³

SL002



120LM/W




Energy Grade E



60/70/90*140°



5 Years Warranty



SMD 3030



50,000h

LifeSpan



Waterproof



IK06

Impact Protection

Product Features

- LED Brand: LED 3030
- Luminous Option: 100/120LM/W
- Color Temp: 4000/5000/6500K
- Color Rendering: Ra>70
- Application: Rural-Road, Parking Lot, Sideway
- Driver Brand: Self-made Isolation, DOB
- Surge Protection: 2KV/4KV
- Power Factor: >0.90
- Driver Replaceable: Yes
- Material: Diecasting Aluminum+PC Lens

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
30	100-277	3600	4000 5000 6500	313*123*60mm	30pc/0.084m³
50	100-277	6000	4000 5000 6500	375*133*60mm	20pc/0.107m³
100	100-277	12000	4000 5000 6500	430*146*75mm	20pc/0.105m³
150	100-277	18000	4000 5000 6500	540*175*80mm	20pc/0.169m³
200	100-277	24000	4000 5000 6500	590*213*80mm	20pc/0.213m³

SL001



90LM/W



Waterproof



70°140°



3 Years Warranty



COB



30,000h

LifeSpan



Product Features

- LED Brand: COB 30W, 50W
- Luminous Option: 80/90LM/W
- Color Temp: 4000/5000/6500K
- Color Rendering: Ra>70
- Application: Rural-Road, Parking Lot, Sideway
- Driver Brand: Self-made Isolation
- Surge Protection: 2KV/4KV
- Power Factor: >0.90
- Driver Replaceable: Yes
- Material: Diecasting Aluminum+PC Lens

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
30	100-277	2700	4000 5000 6500	430*160*65mm	1pc/0.077m³
50	100-277	4500	4000 5000 6500	490*166*60mm	1pc/0.011m³
100	100-277	9000	4000 5000 6500	720*280*75mm	1pc/0.024m³
150	100-277	13500	4000 5000 6500	860*330*75mm	1pc/0.033m³
200	100-277	18000	4000 5000 6500	950*330*80mm	1pc/0.038m³
250	100-277	22500	4000 5000 6500	1100*335*80mm	1pc/0.044m³
300	100-277	27000	4000 5000 6500	1100*335*80mm	1pc/0.044m³

SL003



100LM/W



Waterproof



70°140°



2 Years Warranty



SMD 2835



25,000h

LifeSpan



Product Features

- LED Brand: LED 2835
- Luminous Flux: 100LM/W
- Color Temp: 4000/5000/6500K
- Color Rendering: Ra>70
- Application: Rural-Road, Parking Lot, Sideway
- Driver Brand: Linear, DOB
- Surge Protection: 2KV
- Power Factor: >0.90
- Driver Replaceable: No
- Material: Diecasting Aluminum+PC Lens

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
30	100-277	3600	4000 5000 6500	283*138*24mm	20pc/0.045m³
50	100-277	6000	4000 5000 6500	409*138*24mm	20pc/0.065m³
100	100-277	12000	4000 5000 6500	460*151*24mm	10pc/0.041m³
150	100-277	18000	4000 5000 6500	538*184*24mm	10pc/0.055m³
200	100-277	24000	4000 5000 6500	651*211*24mm	5pc/0.072m³

SL005



90LM/W



Waterproof



70°140°



2 Years Warranty



SMD 2835



25,000h

LifeSpan



Product Features


- LED Brand: LED 2835
- Luminous Flux: 90LM/W
- Color Temp: 4000/5000/6500K
- Color Rendering: Ra>70
- Application: Rural-Road, Parking Lot, Sideway
- Driver Brand: Linear
- Surge Protection: 2KV
- Power Factor: >0.90
- Driver Replaceable: No
- Material: Diecasting Aluminum+Glass

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
50	220-240	4500	4000 5000 6500	291*118*50mm	20pc/0.077m ³
100	220-240	9000	4000 5000 6500	380*145*65mm	20pc/0.068m ³
150	220-240	13500	4000 5000 6500	480*155*77mm	10pc/0.080m ³
200	220-240	18000	4000 5000 6500	530*180*77mm	5pc/0.067m ³



HBL6008

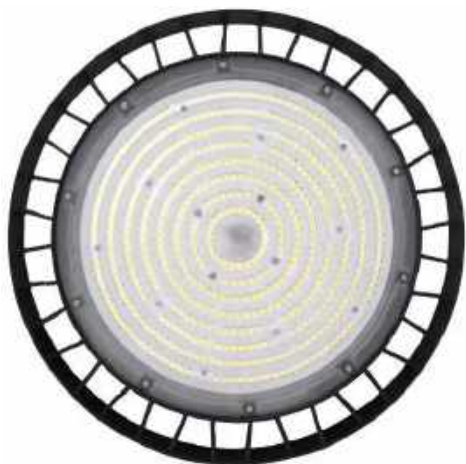

210LM/W



Energy Grade A



60/90/110°



5 Years Warranty



SMD 2835



50,000h

LifeSpan



Waterproof



Impact Protection

Product Features

- LED Brand: Lumiled 3030
- Luminous Option: 150/170/200LM/W
- Color Temp: 3000/4000/5000/6500K
- Color Rendering: Ra>80
- Application: Warehouse, Parking Area, Factory
- Accessories: Sensor+CCT&Power+Bracket
- Driver Brand: Self-made, Lifud, Sosen
- Surge Protection: 4KV
- Power Factor: >0.95
- Driver Replaceable: Yes
- Material: Diecasting Aluminum+PC Lens



Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
100	100-277	20000	3000 4000 5000 6500	240*240*110mm	1pc/0.011m³
150	100-277	30000	3000 4000 5000 6500	285*285*110mm	1pc/0.018m³
200	100-277	40000	3000 4000 5000 6500	330*330*110mm	1pc/0.023m³
250	100-277	50000	3000 4000 5000 6500	330*330*110mm	1pc/0.023m³

HBL7009



210LM/W



Energy Grade A



60/90/110°



5 Years Warranty



SMD 2835



50,000h

LifeSpan



Waterproof



Impact Protection

Product Features

- LED Brand: Lumiled 2835
- Luminous Option: 150/170/190LM/W
- Color Temp: 3000/4000/5000/6500K
- Color Rendering: Ra>80
- Application: Warehouse, Parking Area, Factory
- Accessories: Sensor+CCT&Power+Bracket+Reflector+Emergency+1-10V Dimmable
- Driver Brand: Zhihe, Lifud, Sosen
- Surge Protection: 4KV
- Power Factor: >0.95
- Driver Replaceable: Yes
- Material: Diecasting Aluminum+PC Lens



Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
100	100-277	19000	3000 4000 5000 6500	236*236*101mm	1pc/0.011m³
150	100-277	28500	3000 4000 5000 6500	286*286*106mm	1pc/0.017m³
200	100-277	38000	3000 4000 5000 6500	336*336*115mm	1pc/0.021m³
240	100-277	45600	3000 4000 5000 6500	336*336*115mm	1pc/0.021m³

HBL7013



210LM/W



Energy Grade A



60/90/110°



5 Years Warranty



SMD 2835



50,000h

LifeSpan



Waterproof



IK08

Impact Protection

Product Features

- LED Brand: Lumiled 2835
- Luminous Option: 150/170/190LM/W
- Color Temp: 3000/4000/5000/6500K
- Color Rendering: Ra>80
- Application: Warehouse, Parking Area, Factory
- Accessories: Sensor+CCT&Power+Bracket+Reflector+1-10V Dimmable
- Driver Brand: Zhihe, Lifud, Sosen
- Surge Protection: 4KV
- Power Factor: >0.95
- Driver Replaceable: Yes
- Material: Diecasting Aluminum+PC Lens



Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)				Dimension	Package
100	100-277	19000	3000	4000	5000	6500	231*231*84mm	1pc/0.015m ³
150	100-277	28500	3000	4000	5000	6500	282*282*89mm	1pc/0.019m ³
200	100-277	38000	3000	4000	5000	6500	325*325*92mm	1pc/0.026m ³

HBL7014



190LM/W




Energy Grade B



60/90/110°



5 Years Warranty



SMD 2835



50,000h

LifeSpan



Waterproof



IK08

Impact Protection

Product Features

- LED Brand: Sanan 2835
- Luminous Option: 150/170LM/W
- Color Temp: 3000/4000/5000/6500K
- Color Rendering: Ra>80
- Application: Warehouse, Parking Area, Factory
- Accessories: Sensor+CCT&Power+Bracket+Reflector+1-10V Dimmable
- Driver Brand: Suncom, Zhihe, Lifud
- Surge Protection: 4KV
- Power Factor: >0.95
- Driver Replaceable: Yes
- Material: Diecasting Aluminum+PC Lens



Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)				Dimension	Package
100	100-277	17000	3000	4000	5000	6500	250*250*67mm	1pc/0.015m ³
150	100-277	25500	3000	4000	5000	6500	299*299*72mm	1pc/0.019m ³
200	100-277	34000	3000	4000	5000	6500	340*340*79mm	1pc/0.026m ³

HBL6007



140LM/W



Energy Grade C



60/90/110°



5 Years Warranty



SMD 3030



50,000h

LifeSpan



Waterproof



Impact Protection

Product Features

- LED Brand: LED 3030
- Luminous Option: 120/140LM/W
- Color Temp: 3000/4000/5000/6500K
- Color Rendering: Ra>70
- Application: Warehouse, Parking Area, Factory
- Driver Brand: Self-made, Lifud, Sosen, Philips
- Surge Protection: 4KV
- Power Factor: >0.95
- Driver Replaceable: Yes
- Material: Diecasting Aluminum+PC Lens

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
100	100-277	14000	3000 4000 5000 6500	255*255*135mm	1pc/0.012m ³
150	100-277	21000	3000 4000 5000 6500	330*330*135mm	1pc/0.019m ³
200	100-277	28000	3000 4000 5000 6500	360*360*145mm	1pc/0.024m ³

HBL6005



90LM/W



Energy Grade F



110°



2 Years Warranty



SMD 3030



25,000h

LifeSpan



Waterproof



Impact Protection

Product Features

- LED Brand: LED 2835
- Luminous Option: 90LM/W
- Color Temp: 3000/4000/5000/6500K
- Color Rendering: Ra>70
- Application: Warehouse, Parking Area, Factory
- Driver Brand: Linear, DOB
- Surge Protection: 2KV
- Power Factor: >0.90
- Driver Replaceable: No
- Material: Diecasting Aluminum+PC Lens

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
100	100-277	9000	3000 4000 5000 6500	530*158*100mm	1pc/0.011m ³
150	100-277	13500	3000 4000 5000 6500	583*177*100mm	1pc/0.015m ³
200	100-277	18000	3000 4000 5000 6500	645*214*100mm	1pc/0.019m ³



FL02Q



185LM/W



Energy Grade B



110°



5 Years Warranty



SMD 2835



50,000h

LifeSpan



Waterproof



IK06

Impact Protection

Product Features

- LED Brand: Lumiled 2835
- Luminous Option: 130/140/160LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>70
- Application: Facade, Ports, Construction, Factory
- Driver Brand: Self-made
- Surge Protection: 4KV
- Power Factor: >0.90
- Driver Replaceable: No
- Material: Diecasting Aluminum+Tempered Glass

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
30	165-265	4800	3000 4000 6500	115*135*31mm	30pc/0.032m ³
50	165-265	8000	3000 4000 6500	155*182*36mm	20pc/0.042m ³
100	165-265	16000	3000 4000 6500	195*255*40mm	8pc/0.033m ³
150	165-265	24000	3000 4000 6500	240*300*42mm	6pc/0.036m ³
200	165-265	32000	3000 4000 6500	285*345*46mm	4pc/0.038m ³
300	165-265	48000	3000 4000 6500	340*400*48mm	2pc/0.038m ³
500	165-265	80000	3000 4000 6500	415*486*58mm	2pc/0.026m ³

FL03



185LM/W




Energy Grade B



110°



5 Years Warranty



SMD 2835



50,000h

LifeSpan



Waterproof



IK06

Impact Protection

Product Features

- LED Brand: LED 2835
- Luminous Option: 160LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>70
- Application: Facade, Ports, Construction, Factory
- Driver Brand: Self-made
- Surge Protection: 4KV
- Power Factor: >0.90
- Driver Replaceable: No
- Material: Diecasting Aluminum+Tempered Glass

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
30	165-265	4800	3000 4000 6500	165*153*34mm	8pc/0.013m³
50	165-265	8000	3000 4000 6500	184*169*34mm	8pc/0.015m³
100	165-265	16000	3000 4000 6500	254*243*40mm	6pc/0.023m³
150	165-265	24000	3000 4000 6500	329*295*43mm	2pc/0.022m³
200	165-265	32000	3000 4000 6500	403*350*44mm	2pc/0.031m³
300	165-265	48000	3000 4000 6500	496*445*49mm	2pc/0.053m³

FL07-CCT



120LM/W



Energy Grade E



110°



3 Years Warranty



SMD 2835



25,000h

LifeSpan



Waterproof



Impact Protection

Product Features

- LED Brand: LED 2835
- Luminous Option: 120LM/W
- Temp Option: 3000/4000/6000K Switch
- Power Option: 50/75/100% Switch
- Application: Facade, Ports, Construction, Factory
- Driver Brand: Linear
- Surge Protection: 2/4KV
- Power Factor: >0.90
- Color Rendering: Ra>70
- Material: Diecasting Aluminum+Tempered Glass

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
10-CCT	220-240	1200	3000 4000 6500	124*100*30mm	60pc/0.026m³
20-CCT	220-240	2400	3000 4000 6500	150*130*30mm	60pc/0.034m³
30-CCT	220-240	3600	3000 4000 6500	179*174*30mm	40pc/0.033m³
50-CCT	220-240	6000	3000 4000 6500	214*196*30mm	20pc/0.031m³
100-CCT	220-240	12000	3000 4000 6500	371*219*30mm	10pc/0.032m³
150-CCT	220-240	18000	3000 4000 6500	428*260*30mm	8pc/0.038m³
200-CCT	220-240	24000	3000 4000 6500	486*305*35mm	6pc/0.039m³

FL04



90LM/W




Energy Grade F



110°



3 Years Warranty



SMD 2835



25,000h

LifeSpan



Waterproof



IK06

Impact Protection

Product Features

- LED Brand: LED 2835
- Luminous Option: 160LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>70
- Application: Facade, Ports, Construction, Factory
- Driver Brand: DOB, Linear
- Surge Protection: 2KV
- Power Factor: >0.90
- Driver Replaceable: No
- Material: Diecasting Aluminum+Tempered Glass

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
10	100-277	900	3000 4000 6500	105*85*28mm	60pc/0.026m³
20	100-277	1800	3000 4000 6500	118*93*28mm	60pc/0.034m³
30	100-277	2700	3000 4000 6500	160*120*28mm	40pc/0.033m³
50	165-265	4500	3000 4000 6500	204*145*28mm	20pc/0.031m³
100	100-277	9000	3000 4000 6500	269*209*29mm	10pc/0.032m³
150	100-277	13500	3000 4000 6500	334*229*30mm	8pc/0.038m³
200	100-277	18000	3000 4000 6500	377*277*31mm	6pc/0.039m³

FL01B



90LM/W



Energy Grade F



110°



3 Years Warranty



SMD 2835



25,000h

LifeSpan



Waterproof



IK06

Impact Protection

Product Features

- LED Brand: LED 2835
- Luminous Option: 160LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>70
- Application: Facade, Ports, Construction, Factory
- Driver Brand: DOB, Linear
- Surge Protection: 2KV
- Power Factor: >0.90, >0.50
- Driver Replaceable: No
- Material: Diecasting Aluminum+Tempered Glass

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
10	100-277	900	3000 4000 6500	165*153*34mm	30pc/0.032m³
20	100-277	1800	3000 4000 6500	184*169*34mm	20pc/0.042m³
30	100-277	2700	3000 4000 6500	254*243*40mm	8pc/0.033m³
50	165-265	4500	3000 4000 6500	329*295*43mm	6pc/0.036m³
100	100-277	9000	3000 4000 6500	403*350*44mm	4pc/0.038m³
150	100-277	13500	3000 4000 6500	496*445*49mm	2pc/0.038m³
200	100-277	18000	3000 4000 6500	496*445*49mm	2pc/0.038m³

FL02PC



120LM/W



Energy Grade E



110°



3 Years Warranty



SMD 2835



25,000h

LifeSpan



Waterproof



IK06

Impact Protection

Product Features

- LED Brand: LED 2835
- Luminous Option: 120LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>70
- Application: Facade, Ports, Construction, Factory
- Driver Brand: Linear
- Surge Protection: 2KV
- Power Factor: >0.90
- Driver Replaceable: No
- Material: Diecasting Aluminum+PC Cover

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
10	220-240	800	● 3000 ● 4000 ○ 6500	89*62*26mm	60pc/0.018m ³
20	220-240	1600	● 3000 ● 4000 ○ 6500	112*80*26mm	40pc/0.019m ³
30	220-240	2400	● 3000 ● 4000 ○ 6500	140*100*26mm	20pc/0.015m ³
50	220-240	4000	● 3000 ● 4000 ○ 6500	175*125*28mm	20pc/0.022m ³

FL06



120LM/W



Waterproof



110°



5 Years Warranty



SMD 3030



50,000h

LifeSpan



Product Features

- LED Brand: LED 3030
- Luminous Option: 110LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>70
- Application: Facade, Ports, Construction, Factory
- Driver Brand: Self-made
- Surge Protection: 4KV
- Power Factor: >0.90
- Driver Replaceable: No
- Material: Diecasting Aluminum+PC Cover

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
50	100-277	5500	3000 4000 6500	210*255*55mm	10pc/0.036m³
100	100-277	11000	3000 4000 6500	260*300*50mm	5pc/0.054m³
200	100-277	22000	3000 4000 6500	350*385*75mm	5pc/0.060m³
300	100-277	33000	3000 4000 6500	460*410*77mm	1pc/0.025m³
400	100-277	44000	3000 4000 6500	565*440*80mm	1pc/0.036m³
500	100-277	55000	3000 4000 6500	645*440*85mm	1pc/0.039m³
600	100-277	66000	3000 4000 6500	748*440*90mm	1pc/0.046m³

FL05



120LM/W




Waterproof



110°



3 Years Warranty



SMD 3030



30,000h

LifeSpan

Product Features

- LED Brand: LED 3030
- Luminous Option: 120LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>70
- Application: Rural-Road, Parking Lot, Sideway
- Driver Brand: DOB
- Surge Protection: 2KV
- Power Factor: >0.50
- Driver Replaceable: No
- Material: Diecasting Aluminum+PC Cover

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
50	100-277	6000	3000 4000 6500	205*35*217mm	12pc/0.024m ³
100	100-277	12000	3000 4000 6500	270*39*273mm	10pc/0.035m ³
150	100-277	18000	3000 4000 6500	353*48*353mm	8pc/0.058m ³
200	100-277	24000	3000 4000 6500	353*48*353mm	8pc/0.058m ³
300	100-277	36000	3000 4000 6500	423*50*433mm	6pc/0.065m ³
400	100-277	48000	3000 4000 6500	523*55*537mm	4pc/0.075m ³

FL02B



100LM/W




Waterproof



110°



3 Years Warranty



SMD 3030



30,000h

LifeSpan



Product Features

- LED Brand: LED 3030
- Luminous Option: 100LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>70
- Application: Rural-Road, Parking Lot, Sideway
- Driver Brand: DOB, Linear
- Surge Protection: 2KV
- Power Factor: >0.90, >0.50
- Driver Replaceable: No
- Material: Diecasting Aluminum+PC Cover

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
30	100-277	3000	3000 4000 6500	123*148*24mm	20pc/0.014m ³
50	100-277	5000	3000 4000 6500	160*205*25mm	20pc/0.024m ³
100	100-277	10000	3000 4000 6500	210*270*25mm	20pc/0.041m ³
150	100-277	15000	3000 4000 6500	248*329*25mm	10pc/0.029m ³
200	100-277	20000	3000 4000 6500	280*378*25mm	5pc/0.037m ³
300	100-277	30000	3000 4000 6500	315*425*27mm	5pc/0.049m ³
400	100-277	40000	3000 4000 6500	360*470*28mm	5pc/0.064m ³

FL01



80LM/W



Waterproof



110°



2 Years Warranty



SMD 2835



25,000h

LifeSpan



Product Features

- LED Brand: LED 2835
- Luminous Option: 80LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>70
- Application: Rural-Road, Parking Lot, Sideway
- Driver Brand: DOB, Linear
- Surge Protection: 2KV
- Power Factor: >0.90, >0.50
- Driver Replaceable: No
- Material: Diecasting Aluminum+Tempered Glass

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
10	100-277	800	3000 4000 6500	80*60*20mm	100pc/0.025m ³
20	100-277	1200	3000 4000 6500	90*65*26mm	100pc/0.039m ³
30	100-277	1800	3000 4000 6500	110*77*27mm	40pc/0.020m ³
50	165-265	3000	3000 4000 6500	140*100*26mm	40pc/0.033m ³
100	100-277	6000	3000 4000 6500	195*142*30mm	20pc/0.029m ³
150	100-277	9000	3000 4000 6500	225*155*27mm	10pc/0.019m ³
200	100-277	12000	3000 4000 6500	286*195*28mm	10pc/0.029m ³
300	100-277	18000	3000 4000 6500	317*230*32mm	8pc/0.032m ³
400	100-277	24000	3000 4000 6500	393*295*37mm	4pc/0.026m ³



SF13



140LM/W




Energy Grade E



10°/15°/25°/45°/60°/90°



5 Years Warranty



SMD 2835



50,000h

LifeSpan



Waterproof



Impact Protection

Product Features

- LED Brand: Lumiled 3737/2835
- Luminous Option: 140LM/W
- Color Temp: 4000/5000/5700K/6500K
- Color Rendering: Ra>70/80/90
- Beam Angle: 10°/15°/25°/45°/60°/90°/65*25°
- Application: Stadium, Campus, Tunnel.
- Driver Brand: Sosen/Meanwell
- Surge Protection: 10KV/20KV
- Power Factor: >0.95
- Driver Replaceable: Yes
- Dimmable Type: 1-10V, Dali, DMX
- Material: Diecasting Aluminum+PC

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
240	100-277	33600	4000 5000 6500	558*293*93mm	1pc/0.035m³
480	100-277	67200	4000 5000 6500	558*457*93mm	1pc/0.050m³
720	100-277	108000	4000 5000 6500	558*621*93mm	1pc/0.070m³
960	100-277	134000	4000 5000 6500	558*784*93mm	1pc/0.085m³
1200	100-277	175000	4000 5000 6500	558*948*93mm	1pc/0.099m³

SF10



150LM/W



Energy Grade E



10/15/25/45/60/90°



5 Years Warranty



SMD 3030



50,000h

LifeSpan



Waterproof



Impact Protection

Product Features

- LED Brand: Lumiled 3737/3030
- Luminous Option: 150LM/W
- Color Temp: 4000/5000/5700K/6500K
- Color Rendering: Ra>70/80/90
- Beam Angle: 10°/15°/25°/45°/60°/90°
- Application: Stadium, Campus, Tunnel.
- Driver Brand: Sosen/Meanwell
- Surge Protection: 10KV/20KV
- Power Factor: >0.95
- Driver Replaceable: Yes
- Dimmable Type: 1-10V, Dali, DMX
- Material: Diecasting Aluminum+PC

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
400	100-277	60000	4000 5000 6500	521*511*394mm	1pc/0.027m³
500	100-277	75000	4000 5000 6500	521*511*394mm	1pc/0.027m³
600	100-277	90000	4000 5000 6500	521*511*394mm	1pc/0.027m³
800	100-277	120000	4000 5000 6500	680*660*439mm	1pc/0.049m³
1000	100-277	150000	4000 5000 6500	680*660*439mm	1pc/0.049m³
1200	100-277	180000	4000 5000 6500	680*660*439mm	1pc/0.049m³

FL31



110LM/W




Waterproof



60/70/90°*140°



5 Years Warranty



SMD 3030



50,000h

LifeSpan



Product Features

- LED Brand: SMD 3030
- Luminous Option: 110LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>70
- Application: Stadium, Campus, Tunnel.
- Driver Brand: Self-made
- Surge Protection: 4KV
- Power Factor: >0.90
- Driver Replaceable: Yes
- Material: Diecasting Aluminum+PC

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
100	100-277	11000	4000 5000 6500	400*100*130mm	1pc/0.007m³
200	100-277	22000	4000 5000 6500	400*205*130mm	1pc/0.014m³
300	100-277	33000	4000 5000 6500	400*305*130mm	1pc/0.020m³
400	100-277	44000	4000 5000 6500	400*410*130mm	1pc/0.026m³
500	100-277	55000	4000 5000 6500	400*515*130mm	1pc/0.033m³
600	100-277	66000	4000 5000 6500	765*305*130mm	1pc/0.038m³
800	100-277	88000	4000 5000 6500	765*410*130mm	1pc/0.050m³
1000	100-277	110000	4000 5000 6500	765*515*130mm	1pc/0.062m³
1200	100-277	132000	4000 5000 6500	765*620*130mm	1pc/0.074m³



WL02



120LM/W




Energy Grade E



110°



3 Years Warranty



SMD 2835



25,000h

LifeSpan



Waterproof



IK06

Impact Protection

Product Features

- LED Brand: LED 2835
- Luminous Option: 120LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>80
- Application: Construction, Repair, Garage.
- Cable: HO5RN-F 3G x 1,0mm² 1,0, 1,5, 2,0M
- Driver Brand: Linear
- Surge Protection: 2KV
- Power Factor: >0.90
- Driver Replaceable: No
- Material: Aluminum+PC Cover
- Plug Optional:



EU



UK

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
10	220-240	800	3000 4000 6500	130*120*200mm	8pc/0.030m ³
20	220-240	1600	3000 4000 6500	160*130*230mm	8pc/0.041m ³
30	220-240	2400	3000 4000 6500	190*130*260mm	8pc/0.053m ³
50	220-240	4000	3000 4000 6500	220*160*280mm	6pc/0.058m ³

STREET
LIGHTHIGHBAY
LIGHTFLOOD
LIGHTSTADIUM
LIGHTWORKING
LIGHTTRIPROOF
LIGHT

WL07



100LM/W




Energy Grade F



110°



3 Years Warranty



SMD 2835



25,000h

LifeSpan



Waterproof



Impact Protection

Product Features

- LED Brand: LED 2835
- Luminous Option: 100LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>80
- Application: Construction, Repair, Garage.
- Cable: HO5RN-F 3G x 1,0mm² 1,0, 1,5, 2,0M
- Driver Brand: Linear
- Surge Protection: 2KV
- Power Factor: >0.90
- Driver Replaceable: No
- Material: Aluminum+PC Cover
- Plug Optional:



EU



UK

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
30-AC	220-240	3000	3000 4000 6500	165*155*45mm	10pc/0.024m ³
50-AC	220-240	5000	3000 4000 6500	210*180*45mm	10pc/0.026m ³
30-Charge	7.4V 4000MAH	1700	3000 4000 6500	165*155*45mm	8pc/0.030m ³
50-Charge	7.4V 8000MAH	3000	3000 4000 6500	210*180*45mm	8pc/0.021m ³

STREET
LIGHTHIGHBAY
LIGHTFLOOD
LIGHTSTADIUM
LIGHTWORKING
LIGHTTRIPROOF
LIGHT

WL02T



120LM/W



Energy Grade E



110°



3 Years Warranty



SMD 2835



25,000h

LifeSpan



Waterproof



Impact Protection

Product Features

- LED Brand: LED 2835
- Luminous Option: 100LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>80
- Application: Construction, Repair, Garage.
- Cable: HO5RN-F 3G x 1,0mm² 1,5, 2,0M
- Driver Brand: Linear
- Surge Protection: 2KV
- Power Factor: >0.90
- Driver Replaceable: No
- Material: Aluminum+PC Cover
- Plug Optional:



EU



UK

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
30-Tripod	220-240	2400	3000 4000 6500	1.5m one head	1pc/0.034m³
30*2-Tripod	220-240	4800	3000 4000 6500	1.5m two head	1pc/0.034m³
50-Tripod	220-240	4000	3000 4000 6500	1.5m one head	1pc/0.034m³
50*2-Tripod	220-240	8000	3000 4000 6500	1.5m two head	1pc/0.034m³



TRBSL/PSL



160LM/W



Energy Grade C



120°



5 Years Warranty



SMD 2835



50,000h

LifeSpan



Waterproof



IK06

Impact Protection

Product Features

- LED Brand: BMTC 2835
- Luminous Option: 160LM/W
- Color Temp: 3000/4000/6500K CCT Switch
- Color Rendering: Ra>80
- Application: Factory, Storage, Subway, Dusty place.
- Driver Brand: TRIDONIC, Self-made
- Surge Protection: 4KV
- Power Factor: >0.90
- Driver Replaceable: Yes
- Material: PC housing+PC diffuser

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
10/20	165-265	2600	3000 4000 6500	586*70*60mm	12pc/0.055m ³
18/40	165-265	5200	3000 4000 6500	1186*70*60mm	9pc/0.091m ³
30/50	165-265	6500	3000 4000 6500	1486*70*60mm	9pc/0.113m ³
20	165-265	3200	3000 4000 6500	586*93*71mm	12pc/0.053m ³
40	165-265	6400	3000 4000 6500	1186*93*71mm	9pc/0.080m ³
60	165-265	9600	3000 4000 6500	1486*93*71mm	9pc/0.100m ³

TRCSL



130LM/W




Energy Grade E



120°



5 Years Warranty



SMD 2835



50,000h

LifeSpan



Waterproof



IK06

Impact Protection

Product Features

- LED Brand: BMTC 2835
- Luminous Option: 130LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>80
- Application: Factory, Storage, Subway, Dusty place.
- Driver Brand: Self-made
- Surge Protection: 4KV
- Power Factor: >0.90
- Driver Replaceable: Yes
- Material: PC housing+PC diffuser

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
10/20	165-265	2600	● 3000 ● 4000 ○ 6500	635*62*70mm	12pc/0.050m ³
18/40	165-265	5200	● 3000 ● 4000 ○ 6500	1175*62*70mm	8pc/0.091m ³
25/50	165-265	6500	● 3000 ● 4000 ○ 6500	1475*62*70mm	8pc/0.114m ³

TROX



100LM/W



Waterproof



120°



3 Years Warranty



SMD 2835



30,000h

LifeSpan



Product Features

- LED Brand: LED 2835
- Luminous Option: 100LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>80
- Application: Factory, Storage, Subway, Dusty place.
- Driver Brand: Self-made
- Surge Protection: 2KV
- Power Factor: >0.50
- Driver Replaceable: Yes
- Material: ABS housing+PS/PC diffuser

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
20-PS	165-265	2000	3000 4000 6500	600*85*78mm	8pc/0.044m³
40-PS	165-265	4000	3000 4000 6500	1200*85*78mm	8pc/0.086m³
60-PS	165-265	6000	3000 4000 6500	1500*85*78mm	6pc/0.080m³
20-PC	165-265	2000	3000 4000 6500	600*105*78mm	8pc/0.054m³
40-PC	165-265	4000	3000 4000 6500	1200*105*78mm	8pc/0.105m³
60-PC	165-265	6000	3000 4000 6500	1500*105*78mm	6pc/0.098m³

TROV



100LM/W



Waterproof



120°



3 Years Warranty



SMD 2835



30,000h

LifeSpan



Product Features

- LED Brand: LED 2835
- Luminous Option: 100LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>80
- Application: Factory, Storage, Subway, Dusty place.
- Driver Brand: Self-made
- Surge Protection: 2KV
- Power Factor: >0.90
- Driver Replaceable: Yes
- Material: HIPS/ABS housing+PS/PC diffuser

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
20-PS	165-265	2000	3000 4000 6500	600*70*56mm	15pc/0.051m ³
40-PS	165-265	4000	3000 4000 6500	1200*70*56mm	15pc/0.098m ³
60-PS	165-265	6000	3000 4000 6500	1500*70*56mm	15pc/0.122m ³
20-PC	165-265	2000	3000 4000 6500	600*70*56mm	15pc/0.051m ³
40-PC	165-265	4000	3000 4000 6500	1200*70*56mm	15pc/0.098m ³
60-PC	165-265	48000	3000 4000 6500	1500*70*56mm	15pc/0.122m ³

TR118



LED T8



Waterproof



120°



3 Years Warranty



Product Features

- Light source: LED T8 tube
- Iron plate: Optional
- Application: Factory, Storage, Subway, Dusty place.
- Material: HIPS/ABS/PC housing+PS/PC diffuser

Parameter

Type	Voltage(v)	Tube Qty	LED Tube Power(w)	Dimension	Package
T8-0.6M-1	100-277V	1pcs	8/9/10	663*70*60mm	12pc/0.041m ³
T8-0.6M-2	100-277V	2pcs	8/9/10	1262*70*60mm	12pc/0.077m ³
T8-1.2M-1	100-277V	1pcs	18/20/22	1560*75*60mm	12pc/0.095m ³
T8-1.2M-2	100-277V	2pcs	18/20/22	663*100*60mm	10pc/0.049m ³
T8-1.5M-1	100-277V	1pcs	24/30	1262*100*60mm	10pc/0.092m ³
T8-1.5M-2	100-277V	2pcs	24/30	1560*100*60mm	10pc/0.114m ³

TR136



LED T8



Waterproof



120°



3 Years Warranty



Product Features

- Light source: LED T8 tube
- Iron plate: Optional
- Application: Factory, Storage, Subway, Dusty place.
- Material: HIPS/ABS housing+PS/PC diffuser

Parameter

Type	Voltage(v)	Tube Qty	LED Tube Power(w)	Dimension	Package
T8-0.6M-1	100-277V	1pcs	8/9/10	661*70*60mm	12pc/0.041m ³
T8-0.6M-2	100-277V	2pcs	8/9/10	1271*70*60mm	12pc/0.077m ³
T8-1.2M-1	100-277V	1pcs	18/20/22	1571*70*60mm	12pc/0.095m ³
T8-1.2M-2	100-277V	2pcs	18/20/22	661*95*60mm	10pc/0.049m ³
T8-1.5M-1	100-277V	1pcs	24/30	1271*95*60mm	10pc/0.092m ³
T8-1.5M-2	100-277V	2pcs	24/30	1571*95*60mm	10pc/0.114m ³



BL-06



85LM/W




Energy Grade F



120°



3 Years Warranty



SMD 2835



30,000h

LifeSpan



Waterproof



IK06

Impact Protection

00963F

Product Features

- LED Brand: SMD 2835
- Luminous Option: 85LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>80
- Application: Factory, Storage, Subway, Dusty place.
- Driver Brand: Linear
- Surge Protection: 2KV
- Power Factor: >0.90
- Waterproof: IP65
- Material: PP housing+PC diffuser

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
Round-11	220-240	935	3000 4000 6500	170*170*76mm	24pc/0.062m³
Round-18	220-240	1530	3000 4000 6500	220*220*88mm	20pc/0.095m³
Round-24	220-240	2000	3000 4000 6500	270*270*93mm	16pc/0.121m³
Round-30	220-240	2550	3000 4000 6500	320*320*102mm	10pc/0.114m³
Oval-11	220-240	935	3000 4000 6500	188*128*62mm	16pc/0.028m³
Oval-15	220-240	1275	3000 4000 6500	240*163*78mm	32pc/0.056m³

BL-05



85LM/W




Energy Grade F



120°



3 Years Warranty



SMD 2835



30,000h

LifeSpan



Waterproof



IK06

Impact Protection

Product Features

- LED Brand: SMD 2835
- Luminous Option: 85LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>80
- Application: Factory, Storage, Subway, Dusty place.
- Driver Brand: Linear
- Surge Protection: 2KV
- Power Factor: >0.90
- Sensor Type: PIR
- Material: PP housing+PC diffuser

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
Round-7	220-240	595	3000 4000 6500	140*140*48mm	40pc/0.045m ³
Round-11	220-240	935	3000 4000 6500	170*170*50mm	40pc/0.067m ³
Round-18	220-240	1530	3000 4000 6500	200*200*55mm	20pc/0.053m ³
Round-24	220-240	2040	3000 4000 6500	240*240*55mm	20pc/0.075m ³
Oval-7	220-240	595	3000 4000 6500	160*90*51mm	32pc/0.028m ³
Oval-11	220-240	935	3000 4000 6500	205*105*54mm	32pc/0.044m ³
Oval-18	220-240	1530	3000 4000 6500	260*135*58mm	16pc/0.076m ³

BL-10



85LM/W



Energy Grade F



120°



3 Years Warranty



SMD 2835



30,000h

LifeSpan



Waterproof



IK06

Impact Protection

Product Features

- LED Brand: SMD 2835
- Luminous Option: 85LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>80
- Application: Factory, Storage, Subway, Dusty place.
- Driver Brand: Linear
- Surge Protection: 2KV
- Power Factor: >0.90
- Sensor Type: PIR
- Material: PP housing+PP diffuser

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
Round-7	220-240	595	3000 4000 6500	138*135*48mm	40pc/0.040m ³
Round-11	220-240	935	3000 4000 6500	163*160*50mm	30pc/0.042m ³
Round-18	220-240	1530	3000 4000 6500	183*180*50mm	20pc/0.036m ³
Oval-7	220-240	2000	3000 4000 6500	168*92*48mm	32pc/0.027m ³
Oval-11	220-240	935	3000 4000 6500	168*92*48mm	32pc/0.027m ³
Oval-18	220-240	1530	3000 4000 6500	218*113*50mm	32pc/0.044m ³

BL-01



75LM/W



Waterproof



120°



2 Years Warranty



SMD 2835



25,000h

LifeSpan



Product Features

- LED Brand: LED 2835
- Luminous Option: 100LM/W
- Color Temp: 3000/4000/6500K
- Color Rendering: Ra>80
- Application: Factory, Storage, Subway, Dusty place.
- Driver Brand: Linear
- Surge Protection: 2KV
- Power Factor: >0.50
- Driver Replaceable: No.
- Material: PP housing+PP diffuser

Parameter

Power(w)	Voltage(v)	Lumen	CCT(K)	Dimension	Package
Round-8/12	220-240	600/900	● 3000 ● 4000 ○ 6500	140*140*37mm	40pc/0.031m ³
Round-15	220-240	1125	● 3000 ● 4000 ○ 6500	155*155*37mm	40pc/0.043m ³
Round-18/20	220-240	1350/1500	● 3000 ● 4000 ○ 6500	175*175*37mm	40pc/0.048m ³
Round-24	220-240	1800	● 3000 ● 4000 ○ 6500	210*210*37mm	40pc/0.068m ³
Oval-8/12	220-240	600/900	● 3000 ● 4000 ○ 6500	160*85*35mm	40pc/0.027m ³
Oval-15/18	220-240	1125/1350	● 3000 ● 4000 ○ 6500	195*95*35mm	40pc/0.030m ³
Oval-20/24	220-240	1500/1725	● 3000 ● 4000 ○ 6500	230*105*35mm	40pc/0.043m ³



SL001SL



120LM/W



SMD 5730



Mono Panel



Motion Sensor



30,000h

LifeSpan



3 Years Warranty



Waterproof



Remote Control

Product Features

- LED Type: SMD 5730
- Luminous Efficiency: 120LM/W
- Color Temp: 3000/4000/6500K
- Working Time: 12 hours 2 rainy days
- Application: Billboard, Parking Lot, Rural area
- Solar Panel Type: Monocrystalline Silicon
- Battery Type: LiFePO4 Lithium
- Working Temp: -20℃ -85℃
- Charging Time: 4-6 hours
- Material: ABS

Parameter

Power(w)	Real Power	Lumen	Battery	Solar Panel(w)	Dimension	Package
30	4W	450	3.2V/6AH	7W/6V	380*211*55mm	10pc/0.152m³
60	8W	1000	3.2V/12AH	11W/6V	505*211*55mm	8pc/0.157m³
90	12W	1500	3.2V/12AH	13W/6V	630*230*55mm	6pc/0.148m³
120	15W	1750	3.2V/18AH	17W/6V	745*230*55mm	5pc/0.142m³

SL002SL



120LM/W



SMD 5730



Mono Panel



Motion Sensor



50,000h

LifeSpan



5 Years Warranty



Waterproof



Remote Control

Product Features

- LED Type: SMD 3030
- Luminous Efficiency: 120LM/W
- Color Temp: 3000/4000/6500K
- Working Time: 12 hours 2 rainy days
- Application: Billboard, Parking Lot, Rural area
- Solar Panel Type: Monocrystalline Silicon
- Battery Type: LiFePO4 Lithium
- Working Temp: -20℃ -85℃
- Charging Time: 4-6 hours
- Material: Aluminum

Parameter

Power(w)	Real Power	Lumen	Battery	Solar Panel(w)	Dimension	Package
100	8W	1000	3.2V/18AH	20W/6V	610*385*110mm	1pc/0.035m ³
150	11W	1400	3.2V/24AH	20W/6V	610*385*110mm	1pc/0.035m ³
200	14W	1600	3.2V/30AH	25W/6V	610*385*110mm	1pc/0.035m ³
300	18W	2150	3.2V/36AH	30W/6V	610*385*110mm	1pc/0.035m ³

SL003SL



150LM/W



SMD 3030



Mono Panel



Motion Sensor



50,000h

LifeSpan



5 Years Warranty



Waterproof



Remote Control

Product Features

- LED Type: SMD 3030
- Luminous Efficiency: 150LM/W
- Color Temp: 3000/4000/6500K
- Working Time: 12 hours 2 rainy days
- Application: Billboard, Parking Lot, Rural area
- Solar Panel Type: Monocrystalline Silicon
- Battery Type: LiFePO4 Lithium
- Working Temp: -20℃ -85℃
- Charging Time: 4-6 hours
- Material: Aluminum


Parameter

Power(w)	Real Power	Lumen	Battery	Solar Panel(w)	Dimension	Package
100	8W	1300	3.2V/18AH	20W/6V	445*205*90mm	5pc/0.084m³
200	10W	1500	3.2V/24AH	25W/6V	505*222*90mm	5pc/0.113m³
300	13W	1900	3.2V/30AH	30W/6V	660*236*90mm	5pc/0.135m³

FL02SL



200LM/W



SMD 5054



Mono Panel



Motion Sensor



50,000h

LifeSpan



5 Years Warranty



Waterproof



Remote Control

Product Features

- LED Type: SMD 5054
- Luminous Efficiency: 200LM/W
- Color Temp: 3000/4000/6500K
- Working Time: 12 hours 2 rainy days
- Application: Billboard, Parking Lot, Rural area
- Solar Panel Type: Monocrystalline Silicon
- Battery Type: LiFePO4 Lithium
- Working Temp: -20℃ -85℃
- Charging Time: 4-6 hours
- Material: Aluminum


Parameter

Power(w)	Real Power	Lumen	Battery	Solar Panel(w)	Dimension	Package
100	10W	1800	3.2V/15AH	20W/5V	220*195*41.5mm	20pc/0.052m³
200	18W	3200	3.2V/25AH	30W/5V	260*230*41.5mm	10pc/0.035m³
300	24W	4500	3.2V/35AH	40W/5V	300*255*41.5mm	10pc/0.052m³

FL01SL



120LM/W



SMD 5730



Mono Panel



Motion Sensor



30,000h

LifeSpan



3 Years Warranty



Waterproof



Remote Control

Product Features

- LED Type: SMD 5730
- Luminous Efficiency: 120LM/W
- Color Temp: 3000/4000/6500K
- Working Time: 12 hours 2 rainy days
- Application: Billboard, Parking Lot, Rural area
- Solar Panel Type: Monocrystalline Silicon
- Battery Type: LiFePO4 Lithium
- Working Temp: -20℃ -85℃
- Charging Time: 4-6 hours
- Material: Aluminum

Parameter

Power(w)	Real Power	Lumen	Battery	Solar Panel(w)	Dimension	Package
40	5W	600	3.2V/6AH	5W/6V	230*183*50mm	20pc/0.125m ³
60	7W	840	3.2V/12AH	10W/6V	256*210*65mm	10pc/0.105m ³
100	12W	1600	3.2V/18AH	15W/6V	305*250*75mm	10pc/0.154m ³
200	16W	2500	3.2V/24AH	25W/6V	335*272*78mm	5pc/0.093m ³
300	20W	3600	3.2V/30AH	30W/6V	400*315*90mm	5pc/0.111m ³

Valued



FL02-SL

- LED Type: SMD 2835 35/55pcs
- Max Lumen Output: 300LM
- Battery: 18650 Li-ion 1800/3600mAh
- Solar Panel Type: 1.4W/3.5W
- Sensor Range: 6-8 meters
- Function: Off/Day Light Sensor



FL02-SL-S

- LED Type: SMD 2835 35/55pcs
- Max Lumen Output: 760LM-1800LM
- Battery: 18650 Li-ion 1800mAh-5000mAh
- Solar Panel Type: 5.5V 1.3W
- Sensor Range: 6-8 meters
- Function: Off/Motion Sensor



WL01-3SL

- LED Type: SMD 2835 332pcs
- Max Lumen Output: 800LM
- Battery: 18650 Li-ion 1800mAh
- Solar Panel Type: 5.5V 1.2W
- Sensor Range: 6-8 meters
- Function: Off/Motion Sensor/
Medium Light/Motion Sensor+Dim



WL01-4SL

- LED Type: SMD 2835 423pcs
- Max Lumen Output: 850LM
- Battery: 18650 Li-ion 1800mAh
- Solar Panel Type: 5.5V 1.3W
- Sensor Range: 6-8 meters
- Function: Off/Motion Sensor/
Medium Light/Motion Sensor+Dim



WL02-3SL

- LED Type: SMD 2835 152pcs
- Max Lumen Output: 600LM
- Battery: 18650 Li-ion 1200mAh
- Solar Panel Type: 5.5V 1W
- Sensor Range: 6-8 meters
- Function: Off/Motion Sensor/
Medium Light/Motion Sensor+Dim



WL02-4SL

- LED Type: SMD 2835 188pcs
- Max Lumen Output: 800LM
- Battery: 18650 Li-ion 1200mAh
- Solar Panel Type: 5.5V 1W
- Sensor Range: 6-8 meters
- Function: Off/Motion Sensor/
Medium Light/Motion Sensor+Dim



WL03-1SL

- LED Type: SMD 2835 68pcs
- Max Lumen Output: 500LM
- Battery: 18650 Li-ion 1200mAh
- Solar Panel Type: 5.5V 1.1W
- Sensor Range: 6-8 meters
- Function: Off/Motion Sensor/
Medium Light/Motion Sensor+Dim



WL04-1SL

- LED Type: SMD 2835 171pcs
- Max Lumen Output: 400LM
- Battery: 18650 Li-ion 1200mAh
- Solar Panel Type: 5.5V 1.1W
- Sensor Range: 6-8 meters
- Function: Off/Motion Sensor/
Medium Light/Motion Sensor+Dim



WL05-1SL

- LED Type: SMD 2835 28pcs
- Max Lumen Output: 100LM
- Battery: 18650 Li-ion 1200mAh
- Solar Panel Type: 5.5V 0.5W
- Sensor Range: 6-8 meters
- Function: Off/Day light sensor



WL05-2SL

- LED Type: SMD 2835 20pcs
- Max Lumen Output: 100LM
- Battery: 18650 Li-ion 1200mAh
- Solar Panel Type: 5.5V 0.5W
- Sensor Range: 6-8 meters
- Function: Off/Day light sensor



WL06-2/4SL

- LED Type: SMD 2835 10*2/4pcs
- Max Lumen Output: 120/240LM
- Battery: 18650 Li-ion 1800mAh
- Solar Panel Type: 5.5V 2.5W
- Sensor Range: 6-8 meters
- Function: Off/Day light sensor

Eco



WL01SL-A

- LED Type: SMD 2835 8/12/20pcs
- Max Lumen Output: 80/100/120LM
- Battery: 18650 Li-ion 1200mAh
- Solar Panel Type: 5V 0.55W
- Function: Off/Day Light Sensor



WL01SL-C

- LED Type: SMD 2835 20/40/60pcs
- Max Lumen Output: 180/210/240LM
- Battery: 18650 Li-ion 1200mAh
- Solar Panel Type: 5V 0.55W
- Sensor Range: 3-5 meters
- Function: Off/Motion Sensor/
Medium Light/Motion Sensor+Dim



WL01SL-COB

- LED Type: COB(60pcs)
- Max Lumen Output: 150LM
- Battery: 18650 Li-ion 1200mAh
- Solar Panel Type: 5V 0.55W
- Sensor Range: 3-5 meters
- Function: Off/Motion Sensor/
Medium Light/Motion Sensor+Dim



WL02SL-COB

- LED Type: COB+4+4pcs
- Max Lumen Output: 150LM
- Battery: 18650 Li-ion 1200mAh
- Solar Panel Type: 5V 0.55W
- Sensor Range: 3-5 meters
- Function: Off/Motion Sensor/
Medium Light/Motion Sensor+Dim



WL03SL-COB

- LED Type: COB(96/120pcs)
- Max Lumen Output: 350/400LM
- Battery: 18650 Li-ion 2400mAh
- Solar Panel Type: 5V 1.2W
- Sensor Range: 3-5 meters
- Function: Off/Motion Sensor/
Medium Light/Motion Sensor+Dim



WL04SL-136

- LED Type: SMD 2835 136pcs
- Max Lumen Output: 300LM
- Battery: 18650 Li-ion 2400mAh
- Solar Panel Type: 5V 1.2W
- Sensor Range: 3-5 meters
- Function: Off/Motion Sensor/
Medium Light/Motion Sensor+Dim



WL01SL-B

- LED Type: SMD 2835 20pcs
- Max Lumen Output: 150LM
- Battery: 18650 Li-ion 1200mAh
- Solar Panel Type: 5V 0.55W
- Sensor Range: 3-5 meters
- Function: Off/Motion Sensor/
Medium Light/Motion Sensor+Dim



WL01SL-COB

- LED Type: COB(48pcs)
- Max Lumen Output: 80LM
- Battery: 18650 Li-ion 1200mAh
- Solar Panel Type: 5V 0.55W
- Sensor Range: 3-5 meters
- Function: Off/Motion Sensor/
Medium Light/Motion Sensor+Dim



WL02SL

- LED Type: SMD 2835 24+4+4pcs
- Max Lumen Output: 200LM
- Battery: 18650 Li-ion 1200mAh
- Solar Panel Type: 5V 0.55W
- Sensor Range: 3-5 meters
- Function: Off/Motion Sensor/
Medium Light/Motion Sensor+Dim



WL03SL

- LED Type: SMD 2835 20+20pcs
- Max Lumen Output: 350LM
- Battery: 18650 Li-ion 2400mAh
- Solar Panel Type: 5V 1.2W
- Sensor Range: 3-5 meters
- Function: Off/Motion Sensor/
Medium Light/Motion Sensor+Dim




WL04SL-100

- LED Type: SMD 2835 100pcs
- Max Lumen Output: 250LM
- Battery: 18650 Li-ion 2400mAh
- Solar Panel Type: 5V 0.55W
- Sensor Range: 3-5 meters
- Function: Off/Motion Sensor/
Medium Light/Motion Sensor+Dim



WL04SL-228

- LED Type: SMD 2835 228pcs
- Max Lumen Output: 400LM
- Battery: 18650 Li-ion 2400mAh
- Solar Panel Type: 5V 1.2W
- Sensor Range: 3-5 meters
- Function: Off/Motion Sensor/
Medium Light/Motion Sensor+Dim

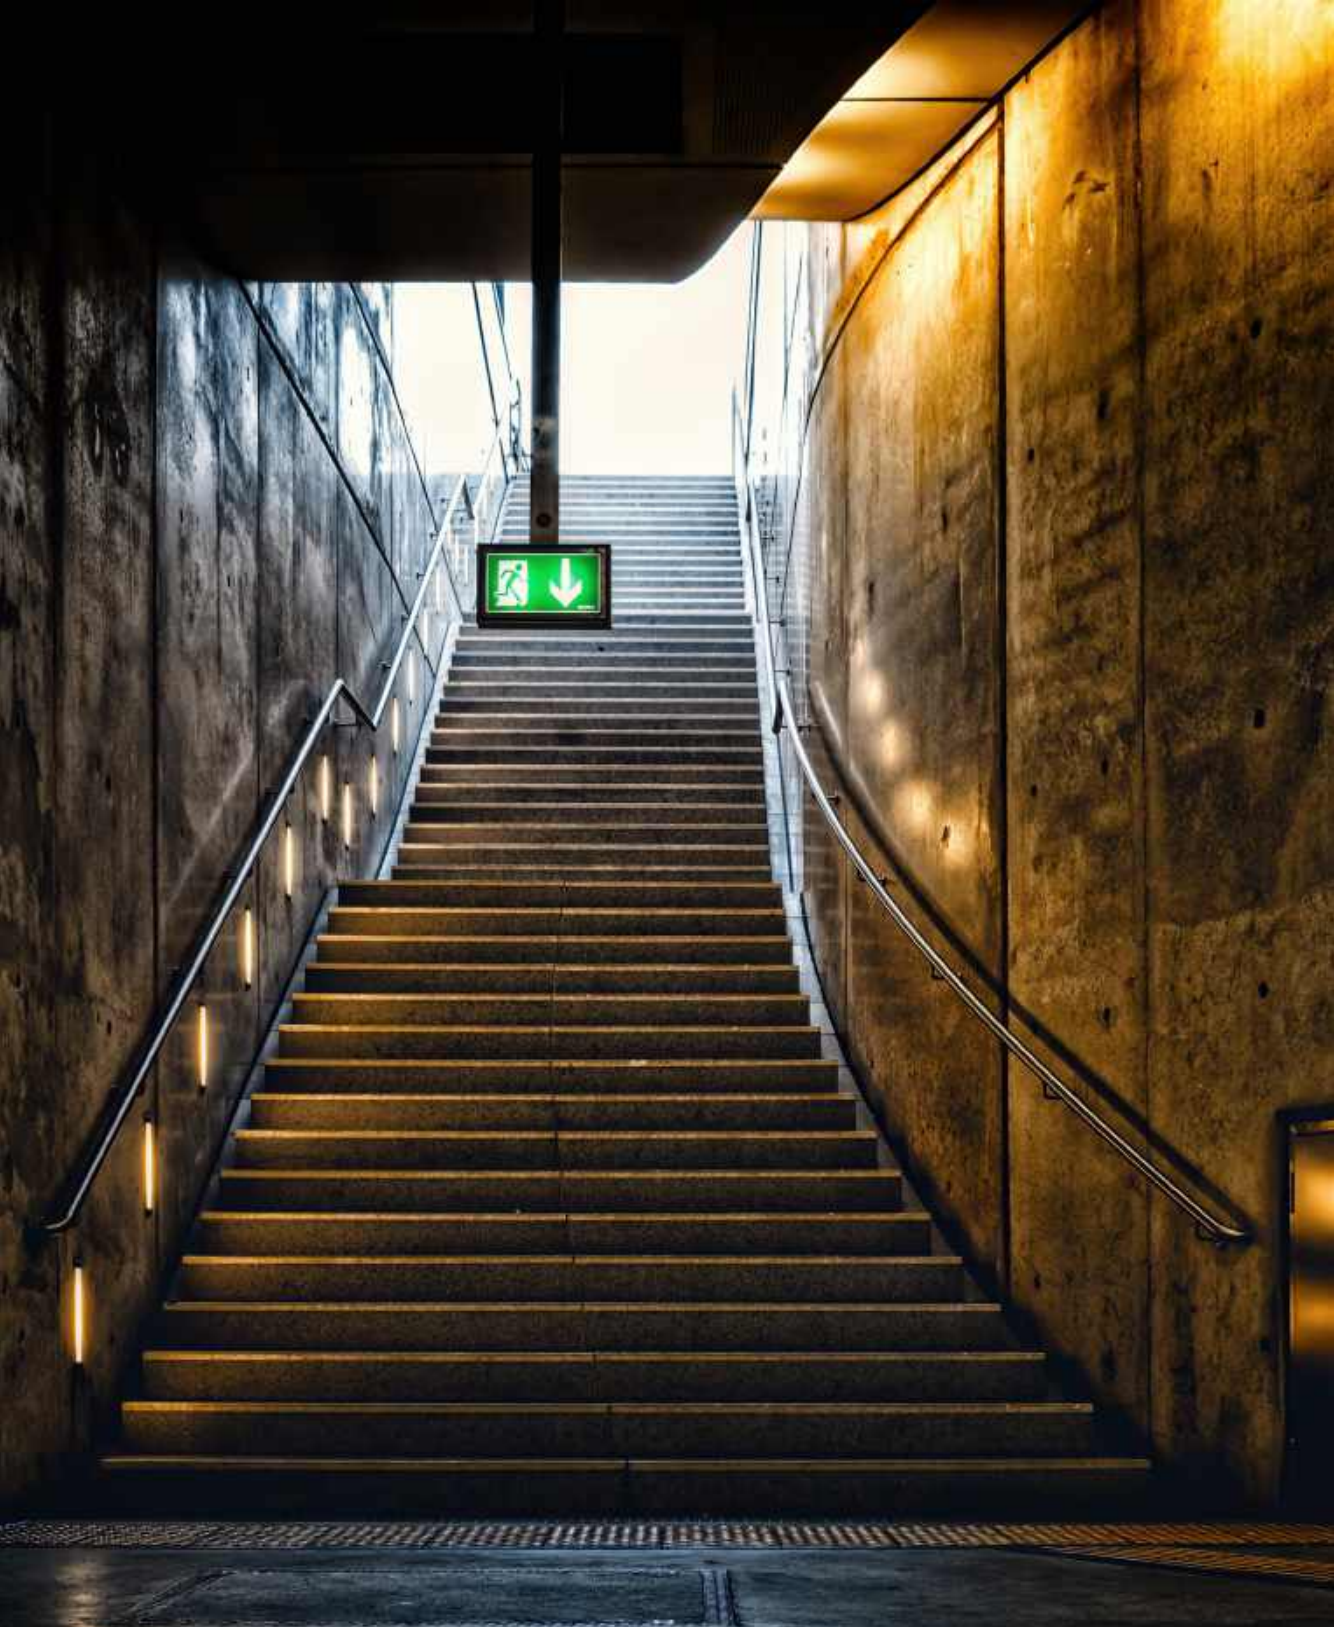

Exit&Emergency Light



EX-41320

- AC/DC in Normal and Emergency Modes
- 3.7V 2200mAh Lithium Battery
- Dimension 320x236x5mm
- 16pcs LED SMD2835
- Wall/Ceiling Mounting



EX-41320H(Replaceable Signs)

- AC/DC in Normal and Emergency Modes
- 3.7V 2200mAh Lithium Battery
- Dimension 320x236x5mm
- 16pcs LED SMD2835
- Wall/Ceiling/Suspend Mounting



EX-49003

- 3.7V 2200mAh Lithium Battery
- Dimension Spot Light 157x17mm
- Emergency Time 3hours
- 3W LED SMD2835
- Cut Size 70-120mm



EX-49004

- 3.7V 2200mAh Lithium Battery
- Dimension Spot Light 55x36mm
- Emergency Time 3hours
- 3W LED SMD2835
- Cut Size 45-50mm



EX-42325

- Maintained/Non-Maintained Modes
- 3.7V 2200mAh Lithium Battery
- Dimension 334x105x43mm
- 30pcs LED SMD2835
- Wall Mounting



EX-49004

- Maintained/Non-Maintained Modes
- 3.7V 2200mAh Lithium Battery
- Dimension 334x105x43mm
- 30pcs LED SMD2835
- Wall Mounting





Post Light



8303-800



8304-800



8306-800



1526-800




1613-800



- Body and bracket in die-cast aluminium
- Silicon rubber gasket
- $\oplus$ 100-277V 50/60Hz
- Clear PC
- $\triangle$ IP44
- $\bullet$ E27 max. 40 Watt (A60)

Diagram

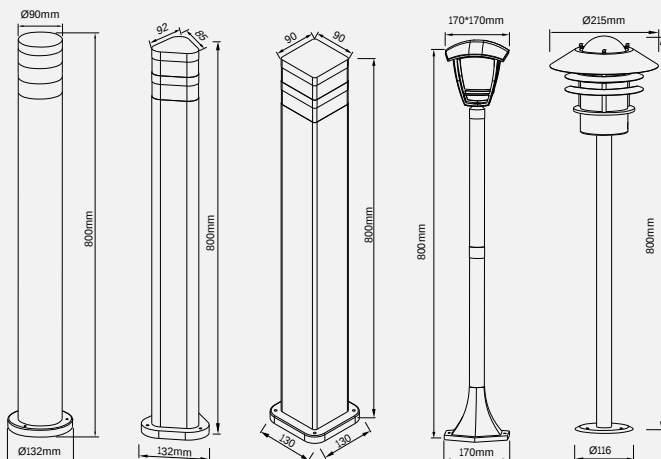

Wall Light(E27)



1521



1620



1612



1611



1601



1601-L



1632




1632-S



- Body and bracket in die-cast aluminium
- Silicon rubber gasket
- 100-277V 50/60Hz
- Clear PC
- IP44
- E27 max. 40 Watt (A60)

Diagram

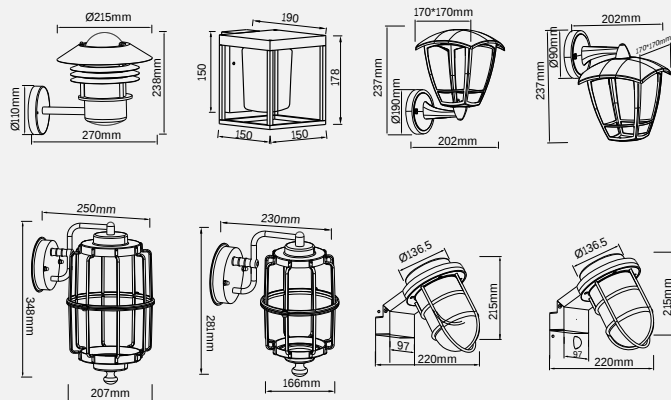

BULKHEAD LIGHT

SOLAR LIGHT

EMERGENCY LIGHT

GARDEN LIGHT

Wall Light(GU10)



8238



8238-L



8232



8303A



8303B



8236



8236-L



8234



8304A













8304B



- Body and bracket in die-cast aluminium
- Silicon rubber gasket
- $\oplus$ 100-277V 50/60Hz
- $\triangle$ IP44
- $\square$ GU10 max. 2x5 Watt
- Clear PC

Diagram



PC Wall Light



2536



2535



2538



2537



2532



2534



2533




2531



- Body and bracket in die-cast aluminium
- Silicon rubber gasket
- 220-240V 50/60Hz
- Clear PC
- IP44
- 10W LED 550lm

Diagram

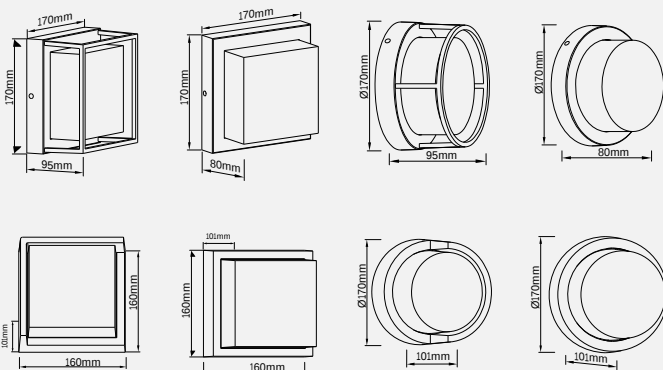

BULKHEAD LIGHT

SOLAR LIGHT

EMERGENCY LIGHT

GARDEN LIGHT